Low Profile Mag Mount Antenna

05/05/2016 v2



Rugged low profile design Covers global cellular / LTE bands Removable magnetic mount


The Panorama LPBEM-7-27 is a range of low cost high performance magnetic mount antennas for temporary fit applications. At only 95mm (3.7") high and protected by a robust high impact radome the antenna is almost impervious to daily wear and tear.


The LPBEM offers excellent performance across a wide bandwidth. The LPBEM-7-27 covers global cellular and LTE frequencies from 698-960 MHz and 1710-3800MHz making it an extremely versatile product. Although intended for magnetic mounting on a conductive ground plane the antenna can also be used for desk mounting applications with some impact on performance.

Supplied with a convenient 2m (6') length of flexible RG174 cable the LPBEM is easy to install and compatible with a large range of modems.

Technical Drawing

LPBEM-7-27-2F shown

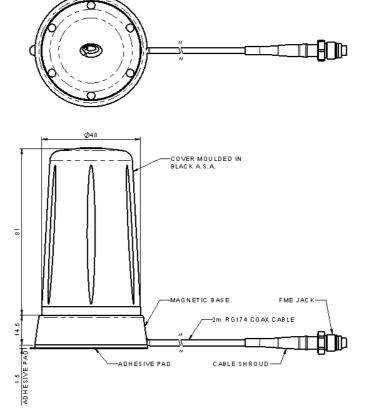

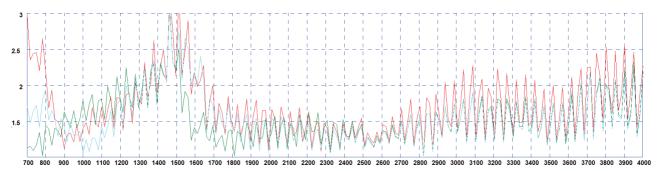

*Red VSWR measured with no ground plane with with 2m (6'6") of RG174 cable.
*Green VSWR measured on a 400x400mm (16x16") ground plane with with 2m (6'6") of RG174 cable.
*Blue VSWR measured on SP5-0470 mounting bracket with with 2m (6'6") of RG174 cable.

| Part No. | | | | |
|--|---------------|--|---------------|--|
| | | LPBEM-7-27-2SP | LPBEM-7-27-2F | |
| Electrical Data | | | | |
| Frequency Range (MHz) | | 698-960 / 1710-3800 | | |
| Operational Band | | 700/800/900/1800/1900/2100/ 2400/2600/3500 | | |
| Peak Gain (excluding cable loss) | 698-960 MHz | 3dBi | 3dBi | |
| | 1710-2170 MHz | 4dBi | | |
| | 2170-2700 MHz | 5dBi | | |
| | 3400-3800MHz | 2dBi | | |
| Typical VSWR* | | <2.5:1 | | |
| Polarisation | | Vertical | | |
| Pattern | | Omni-directional | | |
| Impedance | | 50Ω | | |
| Max Input Power (W) | | 25 | | |
| Mechanical Data | | | | |
| Dimensions (mm) | Height | 95 (3.7") | | |
| | Diameter | 48 (1.89") | | |
| Operating Temp (°C) | | -40°/+80°C (-40°/176°F) | | |
| Material | | UV stable ASA & Aluminium | | |
| Colour | | Black | | |
| Approx Weight (g) | | 150 | | |
| Ingress Protection | | Equivalent to IPX6 | | |
| Mounting Data | | | | |
| Fixing | | Magnetic mount | | |
| Max Speed (KM/h) | | 160 (100 N | 160 (100 Mph) | |
| Cable & Connecto | or Data | | | |
| Cable Type | | RG174 | | |
| Cable Diameter (mm) | | 2.8 (0.1") | | |
| Cable Length (m) | | 2 (6.6′)** | | |

^{**}Other cable lengths and connectors available on request.



Panorama Antennas Ltd

Frogmore, London, SW18 1HF, United Kingdom

T: +44 (0)20 8877 4444 F: +44 (0)20 8877 4477 E: sales@panorama-antennas.com www.panorama-antennas.com

Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice.

Copyright ${\hbox{$\mathbb Q$}}$ Panorama Antennas Ltd. All rights reserved.