



Tango 27

Quad Band 2G (GPRS)/3G/4G Puck Antenna



Key Features

- Quad band 2G/GPRS and 3G
- Small puck design
- Ground plane independent

General Description

The Tango 27 antenna is a compact, versatile, weather resistant, quad band 2G/GPRS and 3G antenna with a 2dBi peak gain and some 4G band coverage.

The Tango 27 is ideal for use on high sided vehicles or for external use with IoT devices in unmanned locations.

It is supplied with a 2.5M cable and SMA male connector. Custom cable lengths and connector types can be specified for volume orders.

Additional Considerations

- Housed in a robust ABS, weather resistant casing
- Does not require placement on a metallic surface
- Meets all EU compliance criteria for electronic goods
- Best for cellular signal coverage in the following bands

2G Band 9 (E-GSM-900)

3G Band 8 (E-GSM-900)

4G Band 20 (800)







Tango 27

Quad Band 2G (GPRS)/3G/4G Puck Antenna

Electrical Specifications

| Operating Temperature: | -30 - +75°C |
|---------------------------|-------------|
| Storage Temperature: | -30 - +75°C |
| Impedance: | 50 Ohm |
| Peak Gain: | 2.16dBi |
| VSWR: | ≤ 2.1 |
| Max Input Power: | 35W |
| Polarization: | Vertical |


2G: 850, 900, 1800, 1900MHz

Operating Frequencies:


3G: 2100MHz 4G - 800MHz

Mechanical Specifications


| Dimensions: | 46 Ø x H15mm |
|-----------------------------|--------------|
| Connector: | SMA Male |
| Cable: | RG174 |
| Housing material: | ABS |
| Mounting Method: | M12 Screw |
| Base: | Adhesive |
| Maximum Material Thickness: | 8mm |

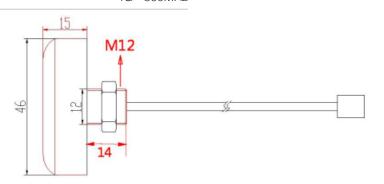

VSWR



Return Loss



sales

email


web





Tango 27

Quad Band 2G (GPRS)/3G/4G Puck Antenna

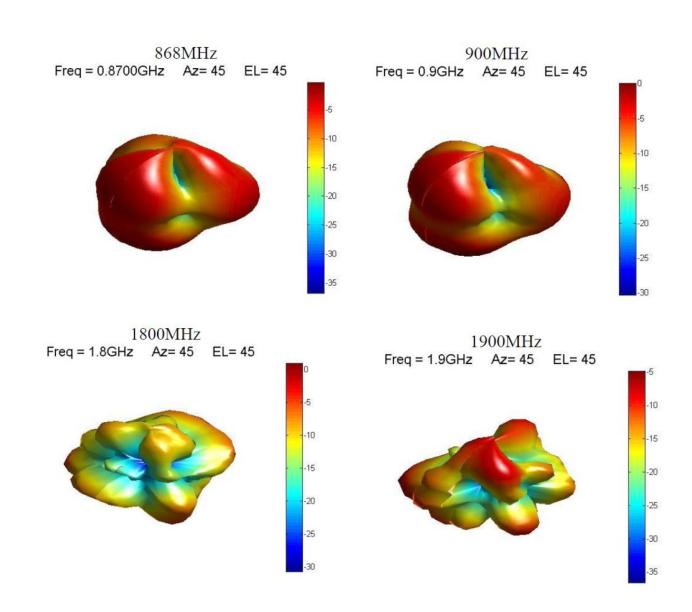

Ordering Details

| Part number | Description |
|--------------------------|--|
| TANGO27/2.5M/SMAM/S/S/17 | Quad Band 2G GSM/GPRS 3G and 4G Puck Antenna |

sales

email

web