
M2M & IOT

TCE-C3G-UF

Pentaband Cellular PCB Antenna

29/03/16 V.2

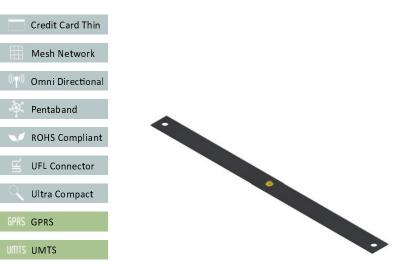

TCE-C3G-UF


Covers 5 cellular bands
Simple & quick installation
Suitable for plastic enclosures

The TCE-C3G antenna covers five cellular bands without compromising on performance or cost makingit an ideal 'one size fits all' product for metering systems, equipment monitoring, and any other applications involving the transmission of data over cellular networks.

The TCE-C3G-UF is easy to install with pre-drilled mounting holes and industry standard UFL socket connector. The small size & low profile allow this antenna to be fitted in small spaces.


It should be noted that the tuning of this antenna may be affected by both the enclosure material and surrounding components. Please contact Panorama for further details.

Technical Drawing

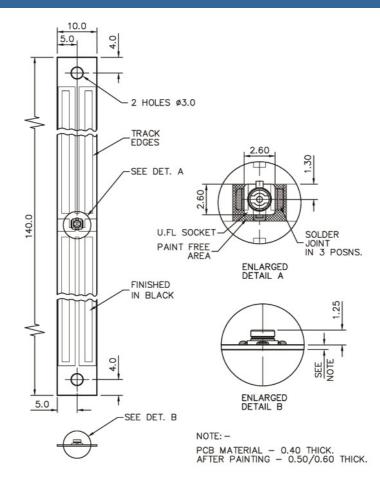

M2M & IOT

Pentaband Cellular PCB Antenna

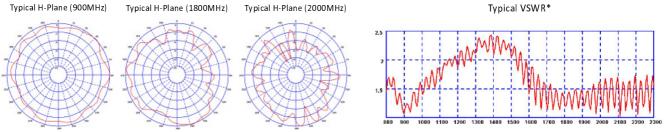

* The VSWR of this antenna will vary depending on the mounting material and cable length.

Part No.

		TCE-C3G-UF
Electrical Data		
Frequency Range (MHz)		805-894, 890-960, 1710-1880, 1900-2170
Operational Band		GSM850 / CDMA850, GSM900, GSM1800, PCS1900, 3G UMTS
Peak Gain: Isotropic		2dBi
Compared to ¼ wave		OdB
Pattern		Omni-directional
Impedance		50Ω
Max Input Power (W)		10
Mechanical Data		
Dimensions (mm)	Length	140 (5.5")
	Width	10 (0.4")
	Thickness	0.6 (0.02")
Operating Temp (°C)		-40° / +80°C (-40° / +176°C)
Colour		Black
Mounting Data		
Fixing Holes Diameter (mm)		Ø 3 (0.11")
Connector		
Туре		U.FL socket
Height (mm)		1.25 (0.05")

Panorama Antennas Ltd

Frogmore, London, SW18 1HF, United Kingdom

T: +44 (0)20 8877 4444 F: +44 (0)20 8877 4477

E: sales@panorama-antennas.com



Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.